

Balance XML Reporting Guide

Version: 2.0.4
09 March 2023

Global Processing Services
6th Floor, Victoria House, Bloomsbury Square, London, WC1B 4DA
Support Email: ops24@globalprocessing.com
Support Phone: +442037409682

For the latest technical documentation, see the [Documentation Portal](#).

© 2023 Global Processing Services Ltd. All Rights Reserved.

Publication number: BXML-2.0.4-3/9/2023

Copyright

© 2023 Global Processing Services Ltd. All Rights Reserved.

The material contained in this guide is copyrighted and owned by Global Processing Services Ltd together with any other intellectual property in such material.

Except for personal and non-commercial use, no part of this guide may be copied, republished, performed in public, broadcast, uploaded, transmitted, distributed, modified or dealt with in any manner at all, without the prior written permission of Global Processing Services Ltd., and, then, only in such a way that the source and intellectual property rights are acknowledged.

To the maximum extent permitted by law, Global Processing Services Ltd shall not be liable to any person or organisation, in any manner whatsoever from the use, construction or interpretation of, or the reliance upon, all or any of the information or materials contained in this guide.

The information in these materials is subject to change without notice and Global Processing Services Ltd. assumes no responsibility for any errors.

About this Guide

This guide is intended as a reference guide, to provide information on the available GPS XML reports. It describes the Balance XML Data Schema elements, sub-elements and attributes.

Target Audience

Technical teams responsible for the handling and processing of the GPS balance XML files. You should have reasonable knowledge of XML/XSD and of the Cards industry.

What's Changed?

If you want to find out what's changed since the previous release, see the [Document History](#) section.

How to use this Guide

If you are new to GPS and want to understand when and how XML files are provided to you, the types of XML files available and how they can be used, see the [Introduction](#) and [Balance Data Files](#) topics. To view an example of a Balance report file, see [Balance Report Example](#). To view the current data schema, see [Balance Report XML Schema](#).

Note: For upcoming/future versions of the Balance XML schema, see the [XSD Schemas](#) section on the Documentation Portal.

For information about the record types and fields in the Balance XML file, see [Primary Elements](#).

Other Documentation

Refer to the table below for a list of other relevant documents that should be used together with this guide.

Document	Description
Transaction XML Guide	Describes the structure and content of the Transaction XML report.
EHI Guide	Provides details of the GPS External Host Interface (EHI).
Smart Client Guide	Describes how to use the GPS Smart Client to manage your account.
Web Services Guide	Describes how to use the GPS web services API.

Tip: For the latest technical documentation, see the [Documentation Portal](#).

SECTION 1: GETTING STARTED

You should read this section if you are new to GPS reports and want to understand what types of reports are available how they are provided.

Topics covered in this section:

- [About this Guide](#)
- [Introduction](#)
- [Transactional Data Files](#)
- [Transactional Data Schema](#)

Tip: To find out what has changed, see the [Document History](#).

1.1 Introduction

GPS provide a number of daily reports, containing details of transactions processed on the system during the past 24 hours.

This includes both authorisations and financial transactions.

Reports are provided by Secure File Transfer Protocol (SFTP).

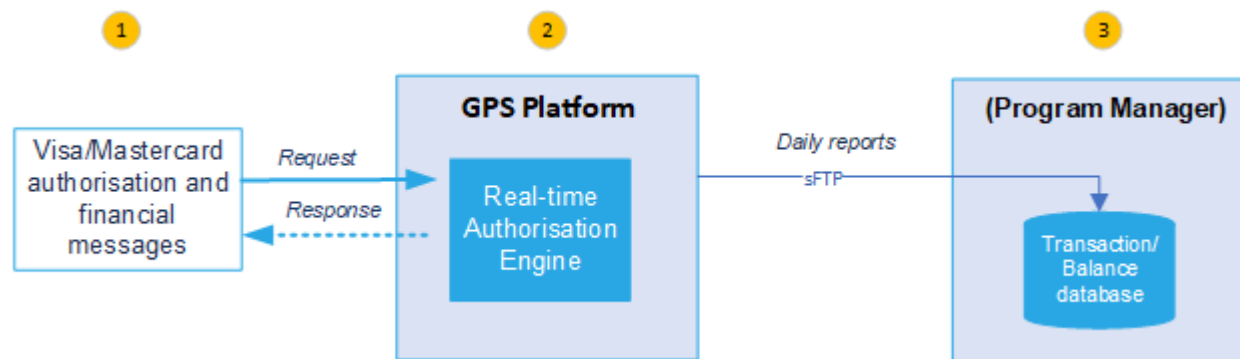


Figure 1: Figure: XML Reporting

1.1.1 Types of Reports

GPS provides the following daily reports to Program Managers:

- **Balance XML Report** - provides details of the balance on each card
- **Transaction XML Report** - contains details of daily transactions

For Issuers and Self-Issuers, GPS provides two additional reports:

- **Fee Collection Report** - gives a summary of Scheme (VISA/Mastercard) Fees by ICA and currency
- **Quarterly Management Report (QMR)** - contains information needed to complete your regulatory Quarterly Management Report

Balance XML Report

Balance XML reports are relevant where GPS maintains details of card balances, such as in EHI modes 2,3,4 and 5 or where EHI is not being used.

The Balance XML report provides details of the balance on each card as at midnight UK time¹ or the time when the XML is run (configurable). You can use this report to confirm how much money is on the card according to GPS systems (where GPS maintain the balance). You can compare this to information you hold in your local card database.

The format and content of the balance XML report is described in this guide.

Transaction XML Report

The Transaction XML report provides details of authorisation and financial advices and any other non-scheme transactions that take place, such as card loads/unloads, balance adjustments (via web services), cardholder fees generated by GPS (you have set up in your fee groups), network scheme fees.

You can use this report to reconcile against Mastercard or Visa settlement advices.

You can also use it to reconcile with data received from EHI.

For more information, see the [Transaction XML Reporting Guide](#).

Fee Collection Report

Fee Collection reports are provided to issuers and self-issuers.

The report is a summary of Scheme (Mastercard/Visa) fees by ICA and currency and can be used to reconcile against the Mastercard/Visa Settlement summary reports. It includes transaction categories such as Interregional non-financial ATM transaction fees, fees for ATM PIN management and ATM Balance Inquiry fees. For more information, contact your GPS Implementation Manager or Account Manager.

Quarterly Management Report (QMR)

Quarterly Management Reports (Mastercard and Quarterly Operating Certificate - Visa) are provided to issuers and self-issuers.

The report provides details needed for quarterly reporting to the Scheme, and includes details such as the number of live cards, card issued, and information on card activity and status. For more information, contact your GPS Implementation Manager or Account Manager.

¹Local UK time, which is either Greenwich Mean Time (GMT) or British Summer Time (BST); For details, see: <https://www.gov.uk/when-do-the-clocks-change>.

1.2 Balance Data Files

GPS can supply you with daily balance files. Balance files are provided by sFTP.

Note: sFTP files are deleted from the GPS sFTP server after two calendar days. They are stored on our archive server for a limited period.

1.2.1 Sending of Files

The balance is the balance of the card at the point the report is generated daily, including non-working days and holidays (usually shortly after midday); the generation job can take up to two hours. Balance data arrives around 5pm UK time ¹, but this can be configured to align with your chosen cut-off time.

Mastercard Cycles

Mastercard has 6 cycles clearing cycles per day, seven days per week. After each clearing cycle, Mastercard sends us clearing files, which contain the settlement data.

We wait until we process all 8 cycles before generating the balance XML report. We send you a single daily file.

Data from cycles 5-8 from the night before and 1-4 from current day form a complete settlement day picture for most regions. These contain all the information you need to reconcile your settlements with Mastercard.

Asia-Pacific

For Asia-Pacific clients we process cycles 2-8 for the previous day and cycle 1 from the current day, and include them in the daily transaction XML report.

Visa Cycles

Visa provide two files (Domestic and International) each day with different timings for some regions (For example, Australia and Hong Kong). There is a maximum filesize so for the largest clients it is possible that more than one Domestic and/or International file will be received on the same day. ²

After processing, we will create the balance XML file and send to you.

1.2.2 File Contents

GPS provides one UTC Balance XML file per Program Manager daily.

The Balance XML file contains a snapshot of balances from the previous day, which is either:

- Cut off of card balance up to midnight UK time from the previous day or the equivalent local midnight cut-off time in your country (if your program has the **balance xml at midnight** setting enabled in Smart Client).¹
- or -
- As at the moment the balance XML is generated, usually around 3:30pm to 6pm UK time, depending on presentment import.

Example 1: midnight setting turned off

On the Saturday 2nd Jan 2023 a file called *GPS-PPPPbalexp20230101.P1.xml* is generated at 5pm, which contains a snapshot of balances as at report creation time of 5pm on Saturday.

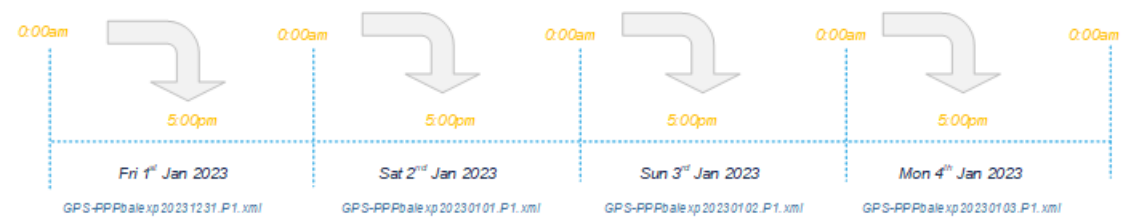


Figure 2: Figure 1 Balance File Reporting Schedule and Filename

¹The *XMLCutoffUTCtime* setting allows you to set the equivalent local midnight cut-off time in your country, if this differs from the UK time. This only applies if the *BalanceXmlAtMidnight* flag is also turned on.

Example 2: Midnight setting turned on

On the Saturday 2nd Jan 2023 a file called *GPS-PPPPbalexp20230101.P1.xml* is generated at 5pm, which contains a snapshot of balances as at midnight on Friday.

Example 3: Midnight setting turned on (Australia)

On the Saturday 2nd Jan 2023 a file called *GPS-PPPPbalexp20230101.P1.xml* is generated at 3am local Australian time, which contains a snapshot of balances as at midnight Friday UK time (10am on Saturday Australian time).

1.2.3 File Format and Encryption

For an example of a balance XML file, see [Balance XML Example](#).

File Naming Convention

The balance XML file use the following naming convention:

On-Premise Customers (P0)

GPS-PPPPbalexpYYYYMMDD.xml

GPS Cloud (P1 and P2)

GPS-PPPPbalexpYYYYMMDD.Pn.xml

Where:

- PPP= The 3-10 letter XML file prefix set up for your programme.
- YYYY= year (4 digits)
- MM = month (2 digits)
- DD = day (2 digits)
- Pn = production environment (2 digits), such as P1and P2. (Not applicable to customers in our UK data centre production environment)

For example:

GPS-NWCtxnexp20230131.P1.xml

Note: The production environment variable is relevant to customers in one of our AWS Cloud-based production environments (P1and P2) and does not apply to exisiting customers in our UK data centre production environment (P0). For details of which production environment applies to your programme, please check with your GPS implementation manager or account manager.

Encryption

XML files are encrypted using PGP, which requires sharing of keys. For details, contact your GPS implementation manager or account manager.

Encoding / Type

balance XML data files are well-formed XML (UTF-8 encoded).

Note: XML is case-sensitive, ensure you follow the correct casing for all XML elements and attribute names when processing the message.

¹Local UK time, which is either Greenwich Mean Time (GMT) or British Summer Time (BST). For details, see: <https://www.gov.uk/when-do-the-clocks-change>.

²Visa Domestic cycle at 9am and International cycle at mid-day, 7 days a week.

1.3 Balance Data Schema

The Balance Data Schema (BDS) describes the structure and possible data values of the GPS Balance XML file .

You can validate the Balance files you receive against the Schema (XSD file) to check it is in the correct format.

The BDS is an evolving standard and is subject to change as the standard evolves. When we make changes to the BDS, we will implement a new version and notify you.

1.3.1 Schema Versions

The schema is not publicly available. GPS sends schema files when a new version of the XML is published. The schema filename indicates the schema version number. The schema file contains a comments section with details of version changes.

For an example of the current Balance Data Schema, see [Balance XML Schema](#).

For a history of changes to the Balance Data Schema, see [Schema Changes](#).

Note: For upcoming/future versions of the Balance XML schema, see the [XSD Schemas](#) section on the Documentation Portal.

1.3.2 Schema Elements

An XML file conforming to the schema consists of the following elements:

- [Primary elements](#)
- [Sub-elements and attributes](#)

SECTION 2: PRIMARY ELEMENTS

This section describes the primary elements in the Balance XML schema.

2.1 Primary Elements

Primary Elements are listed within a **<SCHEME>** parent element, which defines the top-level entities of the message.

- A **SCHEME** element can contain multiple **ACCOUNT** elements
- An **ACCOUNT** element can contain multiple **CARD** elements

2.1.1 Balance Report Example showing the Primary Elements

```
<?xml version="1.0" encoding="utf-8"?>
<SCHEME ID="ABC">
  <ACCOUNT>
    ...detail omitted...
    <CARD>...detail omitted...</CARD>
    <CARD>...detail omitted...</CARD>
  </ACCOUNT>
  <ACCOUNT>...detail omitted...</ACCOUNT>
  <ACCOUNT>...detail omitted...</ACCOUNT>
</SCHEME>
```

2.2 SCHEME

SCHEME records are used to identify the name of scheme used within GPS. This is a container for the accounts element.

Child Element	Description	Data Type	Required	Constraints/ Permitted Values
ID	The ID attribute identifies the Scheme. This is typically absent for most clients.	xs:string	No	Alphanumeric
ACCOUNT	Account elements describe accounts linked to the Scheme.	ACCOUNT	No	See ACCOUNT

Example

```
<SCHEME>
  <ACCOUNT>
    ...detail omitted...
  </ACCOUNT>
</SCHEME>
```

2.3 ACCOUNT

The ACCOUNT element describes an account, balance and currency information. Cards linked to this account are described inside the CARD element.

An account is included in the Balance report if any of the conditions below are met:

- the account has a non-zero balance
- the account has blocked funds
- the account had a non-zero balance or blocked funds within the last two days

Accounts with a zero balance and no blocked funds will be excluded from the Balance report.

Note: Account Number (**ACCNO**) and Currency Code (**CURRCODE**) combine to form a unique record key. Only one instance of an ACCNO/CURRCODE combination can appear in the ACCOUNT element in a Balance report file.

For example:

- You can have two accounts with the same account numbers but different currency codes.
- You cannot have the same account number and the same currency code more than once.

Child Element	Description	Occurs	Data Type	Required	Constraints / Permitted Values
ACCNO	Account number.	1	<ACCNO>	Yes	See ACCNO
CURRCODE	Account 3-letter ISO currency code.	1	<CRDCURRCODE>	Yes	See CRDCURRCODE
ACCTYPE	Account type.	1	<ACCTYPE>	Yes	See ACCTYPE
SORTCODE	Agency Banking sort code (if applicable).	0-1	<SORTCODE>	Optional	See SORTCODE
BANKACC	Agency Banking account number assigned to the card account (if applicable).	0-1	<BANKACC>	Optional	See BANKACC
FEEBAND	Agency Banking Auth Fee Group code (if applicable).	0-1	xs:string	Optional	Alpha, maximum. 10 characters
PAYMENT	Additional payment options activated by card account holder.	0-1	<PAYMENT>	Optional	See PAYMENT
FINAMT	Full account balance. (If negative, will be signed, e.g., -7.00)	1	xs:decimal	Yes	Decimal value
BLKAMT	Pending authorisations. (should never be negative)	1	xs:decimal	Yes	Decimal value
AMTAVL	Account balance amount available (i.e., $AMTAVL = FINAMT - BLKAMT$). (If negative, will be signed)	1	xs:decimal	Yes	Decimal value
LINKEDTOKEN	If the card is linked to another card with a different account, then the field holds the GPS public token of the linked card.	0-1	<LINKEDTOKEN>	Optional	See LINKEDTOKEN
CARD	A card linked to this account.	0-n	<CARD>	Optional	See CARD

Each of the three Account Balance child elements (FINAMT, BLKAMT and AMTAVL) can be updated by the following transaction types:

Note: For details of the transaction type records below, refer to the [Transaction XML Reporting Guide](#).

2.3.1 FINAMT

- CardFinancial transactions (RecordType ADV & REV)
- CardChrgBackRepRes transactions (RecordType CB, CBREV, REPRES & REPRESREV)
- CardLoadUnload transactions (RecordType LOAD, LOADREV, UNLOAD & UNLOADREV)
- CardFee transactions
- CardBalAdjust (RecType ADV & REV)
- Approved AgencyBanking transactions

2.3.2 BLKAMT

- CardAuthorisation transactions (RecType ADV)
- A subsequent matching CardAuthorisation Reversal (RecType REV)

2.3.3 AMTAVL

AMTAVL = sum of FINAMT less BLKAMT

Example

```
<ACCOUNT>
  <ACCNO>1234567891012145</ACCNO>
  <CURRCODE>GBP</CURRCODE>
  <ACCTYPE>00</ACCTYPE>
  <FINAMT>238.76</FINAMT>
  <BLKAMT>10.00</BLKAMT>
  <AMTAVL>228.76</AMTAVL>
  <CARD>...detail ommitted...</CARD>
  <CARD>...detail ommitted...</CARD>
</ACCOUNT>
```


2.4 CARD

The CARD element describes a card linked to an ACCOUNT element.

Child Element	Description	Occurs	Data Type	Required	Constraints / Permitted Values
PAN	Primary Account Number.	1	<PAN>	Yes	See PAN
VIRTUAL	Indicates if the card is a physical or virtual card.	1	<VIRTUAL>	Yes	See VIRTUAL
PRIMARY	Indicates whether or not this is the primary card for the account.	1	<PRIMARY>	Yes	See PRIMARY
CRDPRODUCT	The card scheme/network, which is either Visa (VISA) or Mastercard (MCRD).	1	<CRDPRODUCT>	Yes	See CRDPRODUCT
PROGRAMID	The Co-Brand (i.e. Sub-Scheme) that the Program Manager operates.	0-1	<PROGRAMID>	Optional	See PROGRAMID
CUSTCODE	This may be left blank or populated with the last 8 digits of the PAN.	1	<CUSTCODE>	Yes	See CUSTCODE
STATCODE	The status of the card.	1	<STATCODE>	Yes	See STATCODE
EXPDATE	The expiry date assigned when the card is created. This is either the date you specified when creating the card, or, if a date was not specified, it is based on the default Card Scheme validity period in months (i.e., 36 months from the date of card creation). This date is embossed on the card.	1	<EXPDATE>	Yes	See EXPDATE
GPSEXPDATE	The expiry date you specified on activation of the card or on card activation and load. If no expiry date is specified, this date is based on the GPS validity period in days configured at product level (e.g., 1095 days from the date of card activation).	1	<GPSEXPDATE>	Yes	See GPSEXPDATE
CRDACCNO	Account number of the card. This will be the same as the PAN.	1	<CRDACCNO>	Yes	See CRDACCNO
PRIMARYTOKEN	If you are able to receive full PAN details for your cards, then this field provides the full Primary Account Number (PAN) of the card, as follows: • If the card is a primary card, then this field will display the PAN of the primary card • If the card is a secondary card, then this field will display the PAN of the linked primary card Note: This field will not be displayed if you do not receive full PAN or this is a Multi-FX card.	1	<PRIMARYTOKEN>	Optional	See PRIMARYTOKEN
CRDCURRCODE	The 3-digit ISO currency code linked to the card.	1	<CRDCURRCODE>	Yes	See CRDCURRCODE
LINKEDTOKEN	If the card is linked to another card with a different account, then this field holds the GPS public token of the linked card.	0-1	<LINKEDTOKEN>	Optional	See LINKEDTOKEN
PRODUCTID	Indicates the ID (unique numeric identifier)	1	xs:string	Yes	See PRODUCTID

Child Element	Description	Occurs	Data Type	Required	Constraints / Permitted Values
	of the GPS product associated with the card.				
LASTUPDATED	Timestamp indicating at what point the reported balance was in effect. This is also the date and time of the last transaction for the current card before the balance report was generated.	1	xs:string	Yes	Maximum 14 characters, DateTime in the format: YYYYMMDDHHMMSS

Example

```
<ACCOUNT>
  ...detail ommitted...
  <CARD>
    <PAN>1234567812345678</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>Y</PRIMARY>
    <CRDPRODUCT>ABCD</CRDPRODUCT>
    <PROGRAMID>FEDCBA</PROGRAMID>
    <CUSTCODE></CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>DEF123</CRDACCNO>
    <PRIMARYTOKEN>234321042355666</PRIMARYTOKEN>
    <CRDCURRCODE>GBP</CRDCURRCODE>
    <LINKEDTOKEN>6543210123456789</LINKEDTOKEN>
    <PRODUCTID>9001</PRODUCTID>
    <LASTUPDATED>20190307045701</LASTUPDATED>
  </CARD>
  <CARD>
    <PAN>8765432187654321</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>N</PRIMARY>
    <CRDPRODUCT>ABCD</CRDPRODUCT>
    <PROGRAMID>FEDCBA</PROGRAMID>
    <CUSTCODE></CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-15</EXPDATE>
    <GPSEXPDATE>2021-01-15</GPSEXPDATE>
    <CRDACCNO>DEF123</CRDACCNO>
    <PRIMARYTOKEN>234321042355666</PRIMARYTOKEN>
    <CRDCURRCODE>GBP</CRDCURRCODE>
    <LINKEDTOKEN>6543210123456789</LINKEDTOKEN>
    <PRODUCTID>9001</PRODUCTID>
    <LASTUPDATED>20181012162432</LASTUPDATED>
  </CARD>
</ACCOUNT>
```


SECTION 3: SUB-ELEMENTS AND ATTRIBUTES

This section describes the sub-elements and attributes in the Balance XML schema.

3.1 Sub-elements and Attributes

This section describes the message sub-elements and attributes, listed below in alphabetical order.

ACCNO	EXPDATE	PRODUCTID
ACCTYPE	ID	PROGRAMID
BANKACC	LINKEDTOKEN	SORTCODE
CRDACCNO	PAN	STATCODE
CRDCURRCODE	PAYMENT	VIRTUAL
CRDPRODUCT	PRIMARY	
CUSTCODE	PRIMARYTOKEN	

3.1.1 ACCNO

The ACCNO element is used to describe the account number in the ACCOUNT element. This number is the 16-19 digit GPS public token of the created card, and is generated by GPS. It uses the ACCNO data type.

Description	Base Data Type	Constraints / Permitted Values
The 16-19 digit GPS public token of the created card generated by GPS.	xs:string	Numeric, 16-19 characters.

Example

```
<ACCNO>5432160123456789</ACCNO>
```

3.1.2 ACCTYPE

The ACCTYPE element is used to indicate the type of card account.

Description	Base Data Type	Constraints / Permitted Values
Account card type.	xs:string	Numeric string Valid values are: 00 = Domestic Maestro 01 = Mastercard 02 = Visa

Example

```
<ACCTYPE>00</ACCTYPE>
```

3.1.3 BANKACC

The BANKACC element indicates the agency banking account number assigned to the cardholder's account.

Description	Base Data Type	Constraints / Permitted Values
Virtual agency bank account number assigned to the cardholder's account.	xs:string	Numeric, 8 characters.

Example

```
<BANKACC>12345678</BANKACC>
```

3.1.4 CRDACCNO

The CRDACCNO is used to describe the account number in the CARD element. It uses the CRDACCNO data type.

Description	Base Data Type	Constraints / Permitted Values
Card Account Number.	Xs:string	Numeric, 16-19 characters

Example

```
<CRDACCNO>5432160123456789</CRDACCNO>
```

3.1.5 CRDCURRCODE

- The CURRCODE element indicates the currency the ACCOUNT operates.
- The CRDCURRCODE indicates the currency the CARD operates.

Both elements are based on the CRDCURRCODE data type.

Description	Base Data Type	Constraints / Permitted Values
Currency code (ISO 3 digit).	xs:string	Alphanumeric, maximum 3 characters. See Currency Codes .

Example

```
<CURRCODE>GBP</CURRCODE>
<CRDCURRCODE>GBP</CRDCURRCODE>
```

3.1.6 CRDPRODUCT

The CRDPRODUCT element is used to indicate the card network, which is either Visa (VISA) or Mastercard (MCRD).

Description	Base Data Type	Constraints / Permitted Values
The card network, which is either Visa (VISA) or Mastercard (MCRD).	xs:string	Alphanumeric, maximum 4 characters.

Example

```
<CRDPRODUCT>MCRD</CRDPRODUCT>
```

3.1.7 CUSTCODE

This may be left blank or populated with the last 8 digits of the PAN.

Description	Base Data Type	Constraints / Permitted Values
This may be left blank or populated with the last 8 digits of the PAN.	xs:string	Numeric, maximum 8 characters.

Example

```
<CUSTCODE>12345678</CUSTCODE>
```

3.1.8 EXPDATE

The EXPDATE element indicates the expiry date of the card as specified when the card is created.

Description	Base Data Type	Constraints / Permitted Values
The expiry date assigned when the card is created. This is either the date you specified when creating the card, or, if a date was not specified, it is based on the default Card Scheme validity period in months (e.g., 36 months from the date of card creation). This date is embossed on the card.	xs:string	Alphanumeric, maximum 10 characters, in the format: YYYY-MM-DD.

Example

```
<EXPIRYDATE>2021-01-31</EXPIRYDATE>
```

3.1.9 GPSEXPDATE

The GPSEXPDATE element indicates the expiry date of the card as specified when the card is activated.

Description	Base Data Type	Constraints / Permitted Values
The expiry date you specified on activation of the card or on card activation and load. If no expiry date is specified, this date is based on the GPS validity period in days configured at product level (e.g., 1095 days from the date of card activation). Note: If there is an unknown card without an expiry date (primarily found in the event of a BIN attack) GPS will convert the null GPS Expiry Date to an empty string.	xs:string	Alphanumeric, maximum 10 characters, in the format: YYYY-MM-DD.

Example

```
<GPSEXPDATE>2021-01-31</GPSEXPDATE>
```

3.1.10 ID

The ID attribute identifies the scheme to which the Balance XML data belongs.

Description	Base Data Type	Constraints / Permitted Values
Scheme to which the balance XML belongs. This is typically blank.	xs:string	Alphanumeric, maximum 3 characters.

Example

```
<SCHEME ID="ABC">
```

3.1.11 LINKEDTOKEN

If the card is linked to another card with a different account, then this field holds the GPS public token of the linked card.

Description	Base Data Type	Constraints / Permitted Values
This field is populated when the card is linked to another card on a different account. If the card is not linked then this element may be omitted (i.e. not presented at all).	xs:string	GPS full length public token. Numeric, 16 to 19 digits length.

Example

```
<LINKEDTOKEN>6543210123456789</LINKEDTOKEN>
```

3.1.12 PAN

The PAN element is used to indicate the Primary Account Number of a CARD element. If you are not PCI DSS Compliant then will contain the [GPS 16-digit public token](#).

Description	Base Data Type	Constraints / Permitted Values
Primary Account Number.	xs:string	Numeric, 16 to 19 characters.

Example

```
<PAN>1234567812345678</PAN>
```

GPS 16-digit public token

The format of the 16-digit GPS public token is as follows:

xxxYYYYYYYYYYzzzz

where:

- xxx – is the 3 digits derived from the GPS internal scheme ID
- YYYYYYYYYY – is the 9-digit GPS public token
- zzzz – is the last 4 digits of the card's PAN

3.1.13 PAYMENT

The PAYMENT element describes additional payment options selected by the card account holder.

Description	Base Data Type	Constraints / Permitted Values																				
Additional payment options activated by the card account holder. The code is a combination of the code for activated receipt options and the code for activated payment options.	xs:string	Alphanumeric string of 4 characters. Valid receipt values are: <table><tr><th>Value</th><th>Description</th></tr><tr><td>R0</td><td>No Receipt Options</td></tr><tr><td>R1</td><td>BACS Receipts Only</td></tr><tr><td>R2</td><td>Faster Payment Receipts Only</td></tr><tr><td>R5</td><td>Both Receipt Options</td></tr></table> Valid payment values are: <table><tr><th>Value</th><th>Description</th></tr><tr><td>P0</td><td>No Outbound Options</td></tr><tr><td>P1</td><td>Outbound Faster Payments Only</td></tr><tr><td>P2</td><td>Direct Debit Payments Only</td></tr><tr><td>P5</td><td>Both Outbound Payments Option</td></tr></table>	Value	Description	R0	No Receipt Options	R1	BACS Receipts Only	R2	Faster Payment Receipts Only	R5	Both Receipt Options	Value	Description	P0	No Outbound Options	P1	Outbound Faster Payments Only	P2	Direct Debit Payments Only	P5	Both Outbound Payments Option
Value	Description																					
R0	No Receipt Options																					
R1	BACS Receipts Only																					
R2	Faster Payment Receipts Only																					
R5	Both Receipt Options																					
Value	Description																					
P0	No Outbound Options																					
P1	Outbound Faster Payments Only																					
P2	Direct Debit Payments Only																					
P5	Both Outbound Payments Option																					

Example

```
<PAYMENT>R5P1</PAYMENT>
```

3.1.14 PRIMARY

The PRIMARY element indicates whether or not the card is the Primary card on the account. There can only be one Primary card on a given account.

Description	Base Data Type	Constraints / Permitted Values
Primary Account flag.	xs:string	Valid values: Y = Yes N= No

Example

```
<PRIMARY>Y</PRIMARY>
```

3.1.15 PRIMARYTOKEN

Provides the full Primary Account Number (PAN) of the card.

Note: This field is only available if you receive the full, unencrypted PAN; if you do not receive the full PAN, then this field will not appear.

This field does not appear for Multi-FX cards.

Description	Base Data Type	Constraints / Permitted Values
Provides the full Primary Account Number (PAN) of the card. - If the card is a primary card, then this field will display the PAN of the primary card - If the card is a secondary card, then this field will display the PAN of the linked primary card	xs:string	GPS full length PAN. Numeric, 16 to 19 digits length.

Example

```
<PRIMARYTOKEN>234321042355666</PRIMARYTOKEN>
```

3.1.16 PRODUCTID

The PRODUCTID element indicates the ID of product associated with the card.

Description	Base Data Type	Constraints / Permitted Values
The ID of the product associated with the card.	xs:string	Numeric, 5 maximum.

Example

```
<PRODUCTID>1234</PRODUCTID>
```

3.1.17 PROGRAMID

The PROGRAMID element indicates the program to which the card is linked.

Description	Base Data Type	Constraints / Permitted Values
Program Identifier, the Co-Brand (i.e. Sub-Scheme) that the Programme Manager operates.	xs:string	Alphanumeric, maximum 6 characters.

Example

```
<PROGRAMID>FEDCBA</PROGRAMID>
```

3.1.18 SORTCODE

The SORTCODE element indicates the agency banking sort code assigned to the card program.

Description	Base Data Type	Constraints / Permitted Values
Agency banking sort code applicable to the card program.	xs:string	Numeric, 6 characters.

Example

```
<SORTCODE>123456</SORTCODE>
```

3.1.19 STATCODE

The STATCODE element indicates the card status.

Description	Base Data Type	Constraints / Permitted Values
The card status.	xs:string	Numeric, maximum 2 characters, see Card Status Codes .

Example

```
<STATCODE>00</STATCODE>
```


3.1.20 VIRTUAL

The VIRTUAL element indicates whether the card is a physical or a virtual card.

Description	Base Data Type	Constraints / Permitted Values
Physical or virtual card flag.	xs:string	Valid values: Y = Virtual card N = Physical card

Example

```
<VIRTUAL>Y</VIRTUAL>
```

SECTION 4: APPENDICES

This section provides a list of appendices.

4.1 Appendices

Refer to the table below for details of available appendices:

Appendix	Description
ISO Country Codes	List of ISO country codes.
ISO Currency Codes	List of ISO currency codes.
Card Status Codes	Card status codes.
Balance Report Example	Provides an example of a balance report.
Balance Report XML Schema	Provides a description of the balance report XML schema.

4.2 ISO Country Codes

The table below provides details of ISO two-digit country codes.

Value	Country names	Value	Country names	Value	Country names
AD	Andorra	GL	Greenland	NP	Nepal
AE	United Arab Emirates	GM	Gambia	NR	Nauru
AF	Afghanistan	GN	Guinea	NU	Niue
AG	Antigua and Barbuda	GP	Guadeloupe	NZ	New Zealand
AI	Anguilla	GQ	Equatorial Guinea	OM	Oman
AL	Albania	GR	Greece	PA	Panama
AM	Armenia	GS	South Georgia and the South Sandwich Islands	PE	Peru
AN	Netherlands Antilles			PF	French Polynesia
AO	Angola	GT	Guatemala	PG	Papua New Guinea
AQ	Antarctica	GU	Guam	PH	Philippines
AR	Argentina	GW	Guinea-Bissau	PK	Pakistan
AS	American Samoa	GY	Guyana	PL	Poland
AT	Austria	HK	Hong Kong	PM	Saint Pierre and Miquelon
AU	Australia	HM	Heard Island and McDonald Islands	PN	Pitcairn
AW	Aruba	HN	Honduras	PR	Puerto Rico
AX	Åland Islands	HR	Croatia	PS	Palestinian Territory, Occupied
AZ	Azerbaijan	HT	Haiti	PT	Portugal
BA	Bosnia and Herzegovina	HU	Hungary	PW	Palau
BB	Barbados	ID	Indonesia	PY	Paraguay
BD	Bangladesh	IE	Ireland	QA	Qatar
BE	Belgium	IL	Israel	QZ	UNMI Kosovo
BF	Burkina Faso	IM	Isle of Man	RE	Réunion
BG	Bulgaria	IN	India	RO	Romania
BH	Bahrain	IO	British Indian Ocean Territory	RS	Serbia
BI	Burundi	IQ	Iraq	RU	Russian Federation
BJ	Benin	IR	Iran, Islamic Republic of	RW	Rwanda
BL	Saint Barthélemy	IS	Iceland	SA	Saudi Arabia
BM	Bermuda	IT	Italy	SB	Solomon Islands
BN	Brunei Darussalam	JE	Jersey	SC	Seychelles
BO	Bolivia, Plurinational State of	JM	Jamaica	SD	Sudan
BQ	Bonaire, Sint Eustatius and Saba	JO	Jordan	SE	Sweden
BR	Brazil	JP	Japan	SG	Singapore
BS	Bahamas	KE	Kenya	SH	Saint Helena, Ascension and Tristan da Cunha
BT	Bhutan	KG	Kyrgyzstan	SI	Slovenia
BV	Bouvet Island	KH	Cambodia	SJ	Svalbard and Jan Mayen

Value	Country names	Value	Country names	Value	Country names
BW	Botswana	KI	Kiribati	SK	Slovakia
BY	Belarus	KM	Comoros	SL	Sierra Leone
BZ	Belize	KN	Saint Kitts and Nevis	SM	San Marino
CA	Canada	KP	Korea, Democratic People's Republic of	SN	Senegal
CC	Cocos (Keeling) Islands			SO	Somalia
CD	Congo, the Democratic Republic of the			SR	Suriname
CF	Central African Republic	KR	Korea, Republic of	SS	South Sudan
CG	Congo	KW	Kuwait	ST	Sao Tome and Principe
CH	Switzerland	KY	Cayman Islands	SV	El Salvador
CI	Côte d'Ivoire	KZ	Kazakhstan	SX	Sint Maarten(D)
CK	Cook Islands	LA	Lao People's Democratic Republic	SY	Syrian Arab Republic
CL	Chile			SZ	Swaziland
CM	Cameroon			TC	Turks and Caicos Islands
CN	China	LB	Lebanon	TD	Chad
CO	Colombia	LC	Saint Lucia	TF	French Southern Territories
CR	Costa Rica	LI	Liechtenstein	TG	Togo
CU	Cuba	LK	Sri Lanka	TH	Thailand
CV	Cape Verde	LR	Liberia	TJ	Tajikistan
CW	Curaçao	LS	Lesotho	TK	Tokelau
CX	Christmas Island	LT	Lithuania	TL	Timor-Leste
CY	Cyprus	LU	Luxembourg	TM	Turkmenistan
CZ	Czech Republic	LV	Latvia	TN	Tunisia
DD	Federal Republic of Germany	LY	Libyan Arab Jamahiriya	TO	Tonga
DE	Germany	MA	Morocco	TR	Turkey
DJ	Djibouti	MC	Monaco	TT	Trinidad and Tobago
DK	Denmark	MD	Moldova, Republic of	TV	Tuvalu
DM	Dominica	ME	Montenegro	TW	Taiwan, Province of China
DO	Dominican Republic	MF	Saint Martin (French part)	TZ	Tanzania, United Republic of
DZ	Algeria	MG	Madagascar	UA	Ukraine
EC	Ecuador	MH	Marshall Islands	UG	Uganda
EE	Estonia	MK	Macedonia, the former Yugoslav Republic of	UM	United States Minor Outlying Islands
EG	Egypt	ML	Mali	US	United States
EH	Western Sahara	MM	Myanmar	UY	Uruguay
ER	Eritrea	MN	Mongolia	UZ	Uzbekistan
ES	Spain	MO	Macao	VA	Holy See (Vatican City State)
ET	Ethiopia	MP	Northern Mariana Islands	VC	Saint Vincent and the Grenadines
FI	Finland	MQ	Martinique	VE	Venezuela, Bolivarian Republic of
FJ	Fiji	MR	Mauritania		
		MS	Montserrat		
		MT	Malta		

Value	Country names	Value	Country names	Value	Country names
FK	Falkland Islands (Malvinas)	MU	Mauritius	VG	Virgin Islands, British
FM	Micronesia, Federated States of	MV	Maldives	VI	Virgin Islands, U.S.
FO	Faroe Islands	MW	Malawi	VN	Viet Nam
FR	France	MX	Mexico	VU	Vanuatu
GA	Gabon	MY	Malaysia	WF	Wallis and Futuna
GB	United Kingdom	MZ	Mozambique	WS	Samoa
GD	Grenada	NA	Namibia	YE	Yemen
GE	Georgia	NC	New Caledonia	YT	Mayotte
GF	French Guiana	NE	Niger	ZA	South Africa
GG	Guernsey	NF	Norfolk Island	ZM	Zambia
GH	Ghana	NG	Nigeria	ZW	Zimbabwe
GI	Gibraltar	NI	Nicaragua		
		NL	Netherlands		
		NO	Norway		

4.3 ISO Currency Codes

The table below lists the ISO and Visa/Mastercard currency codes.

Code	Number	Exponent	Currency
AED	784	2	United Arab Emirates dirham
AFN	971	2	Afghan afghani
ALL	008	2	Albanian lek
AMD	051	2	Armenian dram
ANG	532	2	Netherlands Antillean guilder
AOA	973	2	Angolan kwanza
ARS	032	2	Argentine peso
AUD	036	2	Australian dollar
AWG	533	2	Aruban florin
AZN	944	2	Azerbaijani manat
BAM	977	2	Bosnia and Herzegovina convertible mark
BBD	052	2	Barbados dollar
BDT	050	2	Bangladeshi taka
BGN	975	2	Bulgarian lev
BHD	048	3	Bahraini dinar
BIF	108	0	Burundian franc
BMD	060	2	Bermudian dollar
BND	096	2	Brunei dollar
BOB	068	2	Boliviano
BOV	984	2	Bolivian Mvdol
BRL	986	2	Brazilian real
BSD	044	2	Bahamian dollar
BTN	064	2	Bhutanese ngultrum
BWP	072	2	Botswana pula
BYN	933	2	Belarusian ruble (new)
BYR	974	2	Belarusian Ruble (old)
BZD	084	2	Belize dollar
CAD	124	2	Canadian dollar
CDF	976	2	Congolese franc
CHE	947	2	Swiss WIR Euro
CHF	756	2	Swiss franc
CHW	948	2	Swiss WIR Franc
CLF	990	4	Chile Unidad de Fomento
CLP	152	0	Chilean peso
CNH	157	2	Chinese Offshore Renminbi/Yuan

Code	Number	Exponent	Currency
CNY	156	2	Chinese Renminbi/Yuan
COP	170	2	Colombian peso
COU	970	2	Unidad de Valor Real (UVR)
CRC	188	2	Costa Rican colon
CUC	931	2	Cuban convertible peso
CUP	192	2	Cuban peso
CVE	132	0	Cape Verde escudo
CZK	203	2	Czech koruna
DJF	262	0	Djiboutian franc
DKK	208	2	Danish krone
DOP	214	2	Dominican peso
DZD	012	2	Algerian dinar
EGP	818	2	Egyptian pound
ERN	232	2	Eritrean nakfa
ETB	230	2	Ethiopian birr
EUR	978	2	Euro
FJD	242	2	Fiji dollar
FKP	238	2	Falkland Islands pound
GBP	826	2	Great Britain (UK) Pound Sterling
GEL	981	2	Georgian lari
GHS	936	2	Ghanaian cedi
GIP	292	2	Gibraltar pound
GMD	270	2	Gambian dalasi
GNF	324	0	Guinean franc
GTQ	320	2	Guatemalan quetzal
GYD	328	2	Guyanese dollar
HKD	344	2	Hong Kong dollar
HNL	340	2	Honduran lempira
HRK	191	2	Croatian kuna
HTG	332	2	Haitian gourde
HUF	348	2	Hungarian forint
IDR	360	2	Indonesian rupiah
ILS	376	2	Israeli new shekel
INR	356	2	Indian rupee
IQD	368	3	Iraqi dinar
IRR	364	2	Iranian rial
ISK	352	0	Icelandic króna
JMD	388	2	Jamaican dollar

Code	Number	Exponent	Currency
JOD	400	3	Jordanian dinar
JPY	392	0	Japanese yen
KES	404	2	Kenyan shilling
KGS	417	2	Kyrgyzstani som
KHR	116	2	Cambodian riel
KMF	174	0	Comoro franc
KPW	408	2	North Korean won
KRW	410	0	South Korean won
KWD	414	3	Kuwaiti dinar
KYD	136	2	Cayman Islands dollar
KZT	398	2	Kazakhstani tenge
LAK	418	2	Lao kip
LBP	422	2	Lebanese pound
LKR	144	2	Sri Lankan rupee
LRD	430	2	Liberian dollar
LSL	426	2	Lesotho loti
LYD	434	3	Libyan dinar
MAD	504	2	Moroccan dirham
MDL	498	2	Moldovan leu
MGA	969	2	Malagasy ariary
MKD	807	2	Macedonian denar
MMK	104	2	Myanmar kyat
MNT	496	2	Mongolian tögrög
MOP	446	2	Macanese pataca
MRO	478	2	Mauritanian ouguiya (old)
MRU	929	2	Mauritanian ouguiya (new)
MUR	480	2	Mauritian rupee
MVR	462	2	Maldivian rufiyaa
MWK	454	2	Malawian kwacha
MXN	484	2	Mexican peso
MXV	979	2	Mexican Unidad de Inversion (UDI)
MYR	458	2	Malaysian ringgit
MZN	943	2	Mozambican metical
NAD	516	2	Namibian dollar
NGN	566	2	Nigerian naira
NIO	558	2	Nicaraguan córdoba
NOK	578	2	Norwegian krone
NPR	524	2	Nepalese rupee

Code	Number	Exponent	Currency
NZD	554	2	New Zealand dollar
OMR	512	3	Omani rial
PAB	590	2	Panamanian balboa
PEN	604	2	Peruvian sol
PGK	598	2	Papua New Guinean kina
PHP	608	2	Philippine peso
PKR	586	2	Pakistani rupee
PLN	985	2	Polish zloty (new)
PYG	600	0	Paraguayan guaraní
QAR	634	2	Qatari riyal
RON	946	2	Romanian leu
RSD	941	2	Serbian dinar
RUB	643	2	Russian ruble (old)
RUR	810	2	Russian ruble
RWF	646	0	Rwandan franc
SAR	682	2	Saudi riyal
SBD	090	2	Solomon Islands dollar
SCR	690	2	Seychelles rupee
SDG	938	2	Sudanese pound
SEK	752	2	Swedish krona/kronor
SGD	702	2	Singapore dollar
SHP	654	2	Saint Helena pound
SLE	925	2	Sierra Leonean leone (new)
SLL	694	2	Sierra Leonean leone (old)
SOS	706	2	Somali shilling
SRD	968	2	Surinamese dollar
SSP	728	2	South Sudanese pound
STD	678	2	São Tomé and Príncipe dobra (old)
STN	930	2	São Tomé and Príncipe dobra (new)
SVC	222	2	Salvadoran colón
SYP	760	2	Syrian pound
SZL	748	2	Swazi lilangeni
THB	764	2	Thai baht
TJS	972	2	Tajikistani somoni
TMM	795	0	Turkmenistan manat (old)
TMT	934	2	Turkmenistan manat (new)
TND	788	3	Tunisian dinar
TOP	776	2	Tongan pa-anga

Code	Number	Exponent	Currency
TRL	792	2	Turkish lira
TRY	949	2	Turkish lira
TTD	780	2	Trinidad and Tobago dollar
TWD	901	2	New Taiwan dollar
TZS	834	2	Tanzanian shilling
UAH	980	2	Ukrainian hryvnia
UGX	800	0	Ugandan shilling
USD	840	2	United States dollar
USN	997	2	US Dollar (next day)
USS	998	2	US Dollar (same day)
UYI	940	0	Uruguay Peso en Unidades Indexadas
UYU	858	2	Uruguayan peso
UYW	927	4	Unidad previsional
UZS	860	2	Uzbekistan som
VEF	937	2	Venezuelan Bolivar Fuerte (old)
VES	928	2	Venezuelan bolívar soberano (new)
VND	704	0	Vietnamese dong
VUV	548	0	Vanuatu vatu
WST	882	2	Samoan tala
XAF	950	0	CFA franc BEAC
XAG	961	2	Silver (one troy ounce)
XAU	959	2	Gold (one troy ounce)
XBA	955	2	European Composite Unit (EURCO) (bond market unit)
XBB	956	2	European Monetary Unit (E.M.U.-6) (bond market unit)
XBC	957	2	European Unit of Account 9 (E.U.A.-9) (bond market unit)
XBD	958	2	European Unit of Account 17 (E.U.A.-17) (bond market unit)
XCD	951	2	East Caribbean dollar
XDR	960	2	Special drawing rights
XOF	952	0	CFA franc BCEAO
XPD	964	2	Palladium (one troy ounce)
XPF	953	0	CFP franc (franc Pacifique)
XPT	962	2	Platinum (one troy ounce)
XSU	994	2	SUCRE
XTS	963	2	Code reserved for testing purposes
XUA	965	2	ADB Unit of Account
XXX	999	2	No currency
YER	886	2	Yemeni rial
ZAR	710	2	South African rand

Code	Number	Exponent	Currency
ZMK	894	2	Zambian kwacha (old)
ZMW	967	2	Zambian kwacha (new)
ZWD	716	2	Zimbabwean dollar
ZWL	932	2	Zimbabwean dollar A/10

4.4 Card Status Codes

The table below provides details of possible card status codes. These are status values that you can set for a card via Smart Client or web services (refer to the [Web Services Guide](#)).

Status Code	Description
00	All Good. Indicates that the card is good for use, but does not indicate whether it is active.
02	Card not yet activated
04	Capture card
05	Do not honour
14	Invalid card (if you receive this status, it indicates that this card does not exist on the GPS system and was used for a fraudulent transaction)
41	Lost card
43	Stolen card
46	Closed account
54	Expired card
57	Transaction not permitted to cardholder
59	Suspected fraud
62	Restricted card
63	Security violation
70	Cardholder to contact issuer
83	Card destroyed
98	Refund given to customer
99	Card voided
G1	A short-term block which temporarily blocks card usage for all card transactions (excluding Credits and Refunds) for a short period.
G2	Short-term full block (all transactions are blocked).
G3	Long-term block (excluding Credits and Refunds).
G4	Long-term full block (all transactions are blocked).
G5	GPS Protect: A short-term block which temporarily blocks card usage for all card transactions (excluding Credits and Refunds) for a short period.
G6	GPS Protect: Short-term full block (all transactions are blocked).
G7	GPS Protect: Long-term block (excluding Credits and Refunds).
G8	GPS Protect: Long-term full block (all transactions are blocked).
G9	IVR Lost/Stolen block. Non-reversable status, equivalent to status code 41.

4.5 Balance Report Example

Below is an example of a Balance report, containing fictional data. For a description of the XML schema, see [Balance Report XML Schema](#).

```
<?xml version="1.0" encoding="UTF-8"?>
<SCHEME ID="<span class="General.BrandName mc-variable">GPS</span>">
  <ACCOUNT>
    <ACCNO>3641040414129330</ACCNO>
    <CURRCODE>GBP</CURRCODE>
    <ACCTYPE>01</ACCTYPE>
    <FINAMT>5.70</FINAMT>
    <BLKAMT>0.00</BLKAMT>
    <AMTAVL>5.70</AMTAVL>
    <LINKEDTOKEN>1234040414129331</LINKEDTOKEN>
    <CARD>
      <PAN>1234040414129330</PAN>
      <VIRTUAL>N</VIRTUAL>
      <PRIMARY>Y</PRIMARY>
      <CRDPRODUCT>MCRD</CRDPRODUCT>
      <PROGRAMID>GPS</PROGRAMID>
      <CUSTCODE>14129330</CUSTCODE>
      <STATCODE>00</STATCODE>
      <EXPDATE>2022-01-31</EXPDATE>
      <GPSEXPDATE>2021-01-31</GPSEXPDATE>
      <CRDACCNO>3641040414129330</CRDACCNO>
      <PRIMARYTOKEN>1234040414129330</PRIMARYTOKEN>
      <CRDCURRCODE>GBP</CRDCURRCODE>
      <LINKEDTOKEN>3641040414129330</LINKEDTOKEN>
      <PRODUCTID>1234</PRODUCTID>
      <LASTUPDATED>20190306141804</LASTUPDATED>
    </CARD>
  </ACCOUNT>
  <CARD>
    <PAN>1234241730512284</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>N</PRIMARY>
    <CRDPRODUCT>MCRD</CRDPRODUCT>
    <PROGRAMID>GPS</PROGRAMID>
    <CUSTCODE>30512284</CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>3641040414129330</CRDACCNO>
    <PRIMARYTOKEN>1234241730512284</PRIMARYTOKEN>
    <CRDCURRCODE>GBP</CRDCURRCODE>
    <LINKEDTOKEN>3641040414129330</LINKEDTOKEN>
    <PRODUCTID>1234</PRODUCTID>
    <LASTUPDATED>20190128010438</LASTUPDATED>
  </CARD>
</ACCOUNT>
<ACCOUNT>
  <ACCNO>1234002317022966</ACCNO>
  <CURRCODE>GBP</CURRCODE>
  <ACCTYPE>01</ACCTYPE>
  <FINAMT>28.45</FINAMT>
  <BLKAMT>0.00</BLKAMT>
  <AMTAVL>28.45</AMTAVL>
  <CARD>
    <PAN>1234002317022966</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>Y</PRIMARY>
    <CRDPRODUCT>MCRD</CRDPRODUCT>
    <PROGRAMID>GPS</PROGRAMID>
    <CUSTCODE>17022966</CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>3641002317022966</CRDACCNO>
    <PRIMARYTOKEN>1234002317022966</PRIMARYTOKEN>
    <CRDCURRCODE>GBP</CRDCURRCODE>
    <PRODUCTID>1234</PRODUCTID>
    <LASTUPDATED>20190207204750</LASTUPDATED>
  </CARD>
</ACCOUNT>
```

```
</ACCOUNT>
<ACCOUNT>
  <ACCNO>3213425220704785</ACCNO>
  <CURRCODE>EUR</CURRCODE>
  <ACCTYPE>01</ACCTYPE>
  <FINAMT>-7.00</FINAMT>
  <BLKAMT>0.00</BLKAMT>
  <AMTAVL>-7.00</AMTAVL>
  <LINKEDTOKEN>3213425220704785</LINKEDTOKEN>
  <CARD>
    <PAN>3213366722963138</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>N</PRIMARY>
    <CRDPRODUCT>MCRD</CRDPRODUCT>
    <PROGRAMID>448</PROGRAMID>
    <CUSTCODE>22963138</CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>3213425220704785</CRDACCNO>
    <PRIMARYTOKEN>3213425220704785</PRIMARYTOKEN>
    <CRDCURRCODE>EUR</CRDCURRCODE>
    <LINKEDTOKEN>3213425220704785</LINKEDTOKEN>
    <PRODUCTID>1234</PRODUCTID>
    <LASTUPDATED>20190301063737</LASTUPDATED>
  </CARD>
  <CARD>
    <PAN>3213425220704785</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>Y</PRIMARY>
    <CRDPRODUCT>MCRD</CRDPRODUCT>
    <PROGRAMID>448</PROGRAMID>
    <CUSTCODE>20704785</CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>3213425220704785</CRDACCNO>
    <CRDCURRCODE>EUR</CRDCURRCODE>
    <PRIMARYTOKEN>3213425220704785</PRIMARYTOKEN>
    <LINKEDTOKEN>3213425220704785</LINKEDTOKEN>
    <PRODUCTID>1234</PRODUCTID>
    <LASTUPDATED>20190303181455</LASTUPDATED>
  </CARD>
  <CARD>
    <PAN>3219518230396859</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>N</PRIMARY>
    <CRDPRODUCT>MCRD</CRDPRODUCT>
    <PROGRAMID>448</PROGRAMID>
    <CUSTCODE>30396859</CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>3213425220704785</CRDACCNO>
    <CRDCURRCODE>EUR</CRDCURRCODE>
    <PRIMARYTOKEN>3213425220704785</PRIMARYTOKEN>
    <LINKEDTOKEN>3213425220704785</LINKEDTOKEN>
    <PRODUCTID>1234</PRODUCTID>
    <LASTUPDATED>20190129051659</LASTUPDATED>
  </CARD>
</ACCOUNT>
<ACCOUNT>
  <ACCNO>5276026307791793</ACCNO>
  <CURRCODE>GBP</CURRCODE>
  <ACCTYPE>01</ACCTYPE>
  <FINAMT>5.00</FINAMT>
  <BLKAMT>0.00</BLKAMT>
  <AMTAVL>5.00</AMTAVL>
  <LINKEDTOKEN>5273593578585571</LINKEDTOKEN>
  <CARD>
    <PAN>5276026307791793</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>N</PRIMARY>
    <CRDPRODUCT>MCRD</CRDPRODUCT>
```

```
<PROGRAMID>GPS</PROGRAMID>
<CUSTCODE>07791793</CUSTCODE>
<STATCODE>00</STATCODE>
<EXPDATE>2022-01-31</EXPDATE>
<GPSEXPDATE>2021-01-31</GPSEXPDATE>
<CRDACCNO>5273593578585571</CRDACCNO>
<PRIMARYTOKEN>5273593578585571</PRIMARYTOKEN>
<CRDCURRCODE>GBP</CRDCURRCODE>
<LINKEDTOKEN>5273593578585571</LINKEDTOKEN>
<PRODUCTID>1234</PRODUCTID>
<LASTUPDATED>20190226112604</LASTUPDATED>
</CARD>
</ACCOUNT>
<ACCOUNT>
  <ACCNO>5273593578585571</ACCNO>
  <CURRCODE>GBP</CURRCODE>
  <ACCTYPE>01</ACCTYPE>
  <FINAMT>2.75</FINAMT>
  <BLKAMT>0.00</BLKAMT>
  <AMTAVL>2.75</AMTAVL>
  <LINKEDTOKEN>5273593578585571</LINKEDTOKEN>
  <CARD>
    <PAN>5273593578585571</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>Y</PRIMARY>
    <CRDPRODUCT>MCRD</CRDPRODUCT>
    <PROGRAMID>GPS</PROGRAMID>
    <CUSTCODE>78585571</CUSTCODE>
    <STATCODE>00</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>5273593578585571</CRDACCNO>
    <PRIMARYTOKEN>5273593578585571</PRIMARYTOKEN>
    <CRDCURRCODE>GBP</CRDCURRCODE>
    <LINKEDTOKEN>5273593578585571</LINKEDTOKEN>
    <PRODUCTID>1234</PRODUCTID>
    <LASTUPDATED>20190113231425</LASTUPDATED>
  </CARD>
</ACCOUNT>
<ACCOUNT>
  <ACCNO>4321000987654321</ACCNO>
  <CURRCODE>USD</CURRCODE>
  <ACCTYPE>02</ACCTYPE>
  <FINAMT>-15.81</FINAMT>
  <BLKAMT>0.00</BLKAMT>
  <AMTAVL>-15.81</AMTAVL>
  <CARD>
    <PAN>4321000987654321</PAN>
    <VIRTUAL>N</VIRTUAL>
    <PRIMARY>Y</PRIMARY>
    <CRDPRODUCT>VISA</CRDPRODUCT>
    <PROGRAMID>EXVUSD</PROGRAMID>
    <CUSTCODE>78636420</CUSTCODE>
    <STATCODE>14</STATCODE>
    <EXPDATE>2022-01-31</EXPDATE>
    <GPSEXPDATE>2021-01-31</GPSEXPDATE>
    <CRDACCNO>4321000987654321</CRDACCNO>
    <PRIMARYTOKEN>4321000987654321</PRIMARYTOKEN>
    <CRDCURRCODE>USD</CRDCURRCODE>
    <PRODUCTID>4321</PRODUCTID>
    <LASTUPDATED>20190226010433</LASTUPDATED>
  </CARD>
</ACCOUNT>
<ACCOUNT>
  <ACCNO>5679871234554321</ACCNO>
  <CURRCODE>GBP</CURRCODE>
  <ACCTYPE>01</ACCTYPE>
  <SORTCODE>012345</SORTCODE>
  <BANKACC>12345678</BANKACC>
  <FEEBAND>SAMPLE-AB</FEEBAND>
  <PAYMENT>R5P1</PAYMENT>
  <FINAMT>19.20</FINAMT>
  <BLKAMT>17.00</BLKAMT>
  <AMTAVL>2.20</AMTAVL>
```



```
<CARD>
  <PAN>1234871234554321</PAN>
  <VIRTUAL>N</VIRTUAL>
  <PRIMARY>Y</PRIMARY>
  <CRDPRODUCT>MCRD</CRDPRODUCT>
  <PROGRAMID>SAMPLE</PROGRAMID>
  <CUSTCODE>05623001</CUSTCODE>
  <STATCODE>00</STATCODE>
  <EXPDATE>2022-01-31</EXPDATE>
  <GPSEXPDATE>2021-01-31</GPSEXPDATE>
  <CRDACCNO>5679871234554321</CRDACCNO>
  <PRIMARYTOKEN>1234871234554321</PRIMARYTOKEN>
  <CRDCURRCODE>GBP</CRDCURRCODE>
  <PRODUCTID>1235</PRODUCTID>
  <LASTUPDATED>20190303160638</LASTUPDATED>
</CARD>
</ACCOUNT>
</SCHEME>
```

4.6 Balance Report XML Schema

Below is a copy of the latest Balance Report XML schema.

```
<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns="" xmlns:xs="http://www.w3.org/2001/XMLSchema" xmlns:msdata="urn:schemas-microsoft-com:xml-msdata" id="Balances">
  <xs:complexType name="CARD">
    <xs:sequence>
      <xs:element name="PAN" minOccurs="1" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:minLength value="15"/>
            <xs:maxLength value="19"/>
            <xs:pattern value="^\d+$"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="VIRTUAL" minOccurs="1" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="Y"/>
            <xs:enumeration value="N"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="PRIMARY" minOccurs="1" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:enumeration value="Y"/>
            <xs:enumeration value="N"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CRDPRODUCT" minOccurs="1" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="4"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="PROGRAMID" minOccurs="1" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="6"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CUSTCODE" minOccurs="1" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="8"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="STATCODE" type="STATCODE" minOccurs="1" maxOccurs="1" nillable="false"/>
      <xs:element name="EXPDATE" minOccurs="1" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="10"/>
            <xs:pattern value="^(20)\d\d[- /.](0[1-9]|1[012])[- /.](0[1-9]|[12][0-9]|3[01])$"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="GPSEXPDATE" minOccurs="0" maxOccurs="1" nillable="false">
        <xs:simpleType>
          <xs:restriction base="xs:string">
            <xs:maxLength value="10"/>
            <xs:pattern value="^[^](20)\d\d[- /.](0[1-9]|1[012])[- /.](0[1-9]|[12][0-9]|3[01])$"/>
          </xs:restriction>
        </xs:simpleType>
      </xs:element>
      <xs:element name="CRDACCNO" type="ACCNO" minOccurs="1" maxOccurs="1" nillable="false"/>
      <xs:element name="PRIMARYTOKEN" minOccurs="0" maxOccurs="1" nillable="false">

```



```

    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:minLength value="15"/>
        <xs:maxLength value="19"/>
        <xs:pattern value="^\d+$"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="CRDCURRCODE" type="CRDCURRCODE" minOccurs="1" maxOccurs="1" nillable="false"/>
  <xs:element name="LINKEDTOKEN" type="xs:decimal" minOccurs="0" maxOccurs="1" nillable="false"/>
  <xs:element name="PRODUCTID" minOccurs="0" maxOccurs="1" nillable="false">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:maxLength value="5"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
  <xs:element name="LASTUPDATED" minOccurs="1" maxOccurs="1" nillable="false">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:pattern value=""/>
        <xs:maxLength value="14"/>
        <xs:pattern value="([2-9]\d{3}((0[1-9]|1[012])(0[1-9]|1\d|2[0-8])|(0[13456789]|1[012])(29|30)|(0[13578]|1[02])31)|((([2-9]\d)(0[48]|([2468][048]|([13579][26])|((([2468][048]|([3579][26])00))0229)([0-1][0-9]|([2][0-3])([0-5][0-9])([0-5][0-9]))"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:element>
</xs:sequence>
</xs:complexType>
<xs:complexType name="ACCOUNT">
  <xs:sequence>
    <xs:element name="ACCNO" type="ACCNO" minOccurs="1" maxOccurs="1" nillable="false"/>
    <xs:element name="CURRCODE" type="CRDCURRCODE" minOccurs="1" maxOccurs="1" nillable="false"/>
    <xs:element name="ACCTYPE" minOccurs="1" maxOccurs="1" nillable="false">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:enumeration value="00"/>
          <xs:enumeration value="01"/>
          <xs:enumeration value="02"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="SORTCODE" type="SORTCODE" minOccurs="0" maxOccurs="1" nillable="false"/>
    <xs:element name="BANKACC" type="BANKACC" minOccurs="0" maxOccurs="1" nillable="false"/>
    <xs:element name="FEEBAND" minOccurs="0" maxOccurs="1" nillable="false">
      <xs:simpleType>
        <xs:restriction base="xs:string">
          <xs:maxLength value="10"/>
        </xs:restriction>
      </xs:simpleType>
    </xs:element>
    <xs:element name="PAYMENT" type="PAYMENT" minOccurs="0" maxOccurs="1" nillable="false"/>
    <xs:element name="FINAMT" type="xs:decimal" minOccurs="1" maxOccurs="1" nillable="false"/>
    <xs:element name="BLKAMT" type="xs:decimal" minOccurs="1" maxOccurs="1" nillable="false"/>
    <xs:element name="AMTAVL" type="xs:decimal" minOccurs="1" maxOccurs="1" nillable="false"/>
    <xs:element name="LINKEDTOKEN" type="xs:decimal" minOccurs="0" maxOccurs="1" nillable="false"/>
    <xs:sequence minOccurs="0" maxOccurs="unbounded">
      <xs:element name="CARD" type="CARD"/>
    </xs:sequence>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="SCHEME">
  <xs:sequence maxOccurs="unbounded">
    <xs:element name="ACCOUNT" type="ACCOUNT"/>
  </xs:sequence>
  <xs:attribute name="ID" use="optional">
    <xs:simpleType>
      <xs:restriction base="xs:string">
        <xs:maxLength value="3"/>
        <xs:pattern value="^(([A-Za-z0-9]|\s){3})$"/>
      </xs:restriction>
    </xs:simpleType>
  </xs:attribute>
</xs:complexType>

```

```
<xs:simpleType name="ACCNO">
  <xs:restriction base="xs:string">
    <xs:maxLength value="28"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="STATCODE">
  <xs:restriction base="xs:string">
    <xs:enumeration value="00"/>
    <xs:enumeration value="01"/>
    <xs:enumeration value="02"/>
    <xs:enumeration value="03"/>
    <xs:enumeration value="04"/>
    <xs:enumeration value="05"/>
    <xs:enumeration value="06"/>
    <xs:enumeration value="08"/>
    <xs:enumeration value="10"/>
    <xs:enumeration value="12"/>
    <xs:enumeration value="13"/>
    <xs:enumeration value="14"/>
    <xs:enumeration value="15"/>
    <xs:enumeration value="17"/>
    <xs:enumeration value="30"/>
    <xs:enumeration value="31"/>
    <xs:enumeration value="32"/>
    <xs:enumeration value="33"/>
    <xs:enumeration value="36"/>
    <xs:enumeration value="37"/>
    <xs:enumeration value="38"/>
    <xs:enumeration value="41"/>
    <xs:enumeration value="43"/>
    <xs:enumeration value="46"/>
    <xs:enumeration value="51"/>
    <xs:enumeration value="54"/>
    <xs:enumeration value="55"/>
    <xs:enumeration value="57"/>
    <xs:enumeration value="58"/>
    <xs:enumeration value="59"/>
    <xs:enumeration value="61"/>
    <xs:enumeration value="62"/>
    <xs:enumeration value="63"/>
    <xs:enumeration value="64"/>
    <xs:enumeration value="65"/>
    <xs:enumeration value="66"/>
    <xs:enumeration value="67"/>
    <xs:enumeration value="68"/>
    <xs:enumeration value="6P"/>
    <xs:enumeration value="70"/>
    <xs:enumeration value="71"/>
    <xs:enumeration value="75"/>
    <xs:enumeration value="76"/>
    <xs:enumeration value="77"/>
    <xs:enumeration value="78"/>
    <xs:enumeration value="79"/>
    <xs:enumeration value="80"/>
    <xs:enumeration value="81"/>
    <xs:enumeration value="82"/>
    <xs:enumeration value="83"/>
    <xs:enumeration value="85"/>
    <xs:enumeration value="86"/>
    <xs:enumeration value="87"/>
    <xs:enumeration value="88"/>
    <xs:enumeration value="89"/>
    <xs:enumeration value="90"/>
    <xs:enumeration value="91"/>
    <xs:enumeration value="92"/>
    <xs:enumeration value="93"/>
    <xs:enumeration value="94"/>
    <xs:enumeration value="95"/>
    <xs:enumeration value="96"/>
    <xs:enumeration value="98"/>
    <xs:enumeration value="99"/>
    <xs:enumeration value="C0"/>
    <xs:enumeration value="C1"/>
    <xs:enumeration value="N0"/>
  </xs:restriction>
</xs:simpleType>
```

```
<xs:enumeration value="N7"/>
<xs:enumeration value="P5"/>
<xs:enumeration value="P6"/>
<xs:enumeration value="G1"/>
<xs:enumeration value="G2"/>
<xs:enumeration value="G3"/>
<xs:enumeration value="G4"/>
<xs:enumeration value="G5"/>
<xs:enumeration value="G6"/>
<xs:enumeration value="G7"/>
<xs:enumeration value="G8"/>
<xs:enumeration value="G9"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="CRDCURRCODE">
  <xs:restriction base="xs:string">
    <xs:maxLength value="3"/>
    <xs:enumeration value="AED"/>
    <xs:enumeration value="AFN"/>
    <xs:enumeration value="ALL"/>
    <xs:enumeration value="AMD"/>
    <xs:enumeration value="ANG"/>
    <xs:enumeration value="AOA"/>
    <xs:enumeration value="ARS"/>
    <xs:enumeration value="AUD"/>
    <xs:enumeration value="AWG"/>
    <xs:enumeration value="AZN"/>
    <xs:enumeration value="BAM"/>
    <xs:enumeration value="BBD"/>
    <xs:enumeration value="BDT"/>
    <xs:enumeration value="BGN"/>
    <xs:enumeration value="BHD"/>
    <xs:enumeration value="BIF"/>
    <xs:enumeration value="BMD"/>
    <xs:enumeration value="BND"/>
    <xs:enumeration value="BOB"/>
    <xs:enumeration value="BOV"/>
    <xs:enumeration value="BRL"/>
    <xs:enumeration value="BSD"/>
    <xs:enumeration value="BTN"/>
    <xs:enumeration value="BWP"/>
    <xs:enumeration value="BYR"/>
    <xs:enumeration value="BZD"/>
    <xs:enumeration value="CAD"/>
    <xs:enumeration value="CDF"/>
    <xs:enumeration value="CHE"/>
    <xs:enumeration value="CHF"/>
    <xs:enumeration value="CHW"/>
    <xs:enumeration value="CLF"/>
    <xs:enumeration value="CLP"/>
    <xs:enumeration value="CNY"/>
    <xs:enumeration value="COP"/>
    <xs:enumeration value="COU"/>
    <xs:enumeration value="CRC"/>
    <xs:enumeration value="CSD"/>
    <xs:enumeration value="CUC"/>
    <xs:enumeration value="CUP"/>
    <xs:enumeration value="CVE"/>
    <xs:enumeration value="CYP"/>
    <xs:enumeration value="CZK"/>
    <xs:enumeration value="DJF"/>
    <xs:enumeration value="DKK"/>
    <xs:enumeration value="DOP"/>
    <xs:enumeration value="DZD"/>
    <xs:enumeration value="EEK"/>
    <xs:enumeration value="EGP"/>
    <xs:enumeration value="ERN"/>
    <xs:enumeration value="ETB"/>
    <xs:enumeration value="EUR"/>
    <xs:enumeration value="FJD"/>
    <xs:enumeration value="FKP"/>
    <xs:enumeration value="GBP"/>
    <xs:enumeration value="GEL"/>
    <xs:enumeration value="GHC"/>
```

```
<xs:enumeration value="GHS"/>
<xs:enumeration value="GIP"/>
<xs:enumeration value="GMD"/>
<xs:enumeration value="GNF"/>
<xs:enumeration value="GTQ"/>
<xs:enumeration value="GWP"/>
<xs:enumeration value="GYD"/>
<xs:enumeration value="HKD"/>
<xs:enumeration value="HNL"/>
<xs:enumeration value="HRK"/>
<xs:enumeration value="HTG"/>
<xs:enumeration value="HUF"/>
<xs:enumeration value="IDR"/>
<xs:enumeration value="ILS"/>
<xs:enumeration value="INR"/>
<xs:enumeration value="IQD"/>
<xs:enumeration value="IRR"/>
<xs:enumeration value="ISK"/>
<xs:enumeration value="JMD"/>
<xs:enumeration value="JOD"/>
<xs:enumeration value="JPY"/>
<xs:enumeration value="KES"/>
<xs:enumeration value="KGS"/>
<xs:enumeration value="KHR"/>
<xs:enumeration value="KMF"/>
<xs:enumeration value="KPW"/>
<xs:enumeration value="KRW"/>
<xs:enumeration value="KWD"/>
<xs:enumeration value="KYD"/>
<xs:enumeration value="KZT"/>
<xs:enumeration value="LAK"/>
<xs:enumeration value="LBP"/>
<xs:enumeration value="LKR"/>
<xs:enumeration value="LRD"/>
<xs:enumeration value="LSL"/>
<xs:enumeration value="LTL"/>
<xs:enumeration value="LVL"/>
<xs:enumeration value="LYD"/>
<xs:enumeration value="MAD"/>
<xs:enumeration value="MDL"/>
<xs:enumeration value="MGA"/>
<xs:enumeration value="MKD"/>
<xs:enumeration value="MMK"/>
<xs:enumeration value="MNT"/>
<xs:enumeration value="MOP"/>
<xs:enumeration value="MRO"/>
<xs:enumeration value="MTL"/>
<xs:enumeration value="MUR"/>
<xs:enumeration value="MVR"/>
<xs:enumeration value="MWK"/>
<xs:enumeration value="MXN"/>
<xs:enumeration value="MXV"/>
<xs:enumeration value="MYR"/>
<xs:enumeration value="MZM"/>
<xs:enumeration value="MZN"/>
<xs:enumeration value="NAD"/>
<xs:enumeration value="NGN"/>
<xs:enumeration value="NIO"/>
<xs:enumeration value="NOK"/>
<xs:enumeration value="NPR"/>
<xs:enumeration value="NZD"/>
<xs:enumeration value="OMR"/>
<xs:enumeration value="PAB"/>
<xs:enumeration value="PEN"/>
<xs:enumeration value="PGK"/>
<xs:enumeration value="PHP"/>
<xs:enumeration value="PKR"/>
<xs:enumeration value="PLN"/>
<xs:enumeration value="PYG"/>
<xs:enumeration value="QAR"/>
<xs:enumeration value="RON"/>
<xs:enumeration value="RSD"/>
<xs:enumeration value="RUB"/>
<xs:enumeration value="RWF"/>
```

```
<xs:enumeration value="SAR"/>
<xs:enumeration value="SBD"/>
<xs:enumeration value="SCR"/>
<xs:enumeration value="SDG"/>
<xs:enumeration value="SEK"/>
<xs:enumeration value="SGD"/>
<xs:enumeration value="SHP"/>
<xs:enumeration value="SKK"/>
<xs:enumeration value="SLL"/>
<xs:enumeration value="SOS"/>
<xs:enumeration value="SRD"/>
<xs:enumeration value="STD"/>
<xs:enumeration value="SVC"/>
<xs:enumeration value="SYP"/>
<xs:enumeration value="SZL"/>
<xs:enumeration value="THB"/>
<xs:enumeration value="TJS"/>
<xs:enumeration value="TMT"/>
<xs:enumeration value="TND"/>
<xs:enumeration value="TOP"/>
<xs:enumeration value="TRY"/>
<xs:enumeration value="TTD"/>
<xs:enumeration value="TWD"/>
<xs:enumeration value="TZS"/>
<xs:enumeration value="UAH"/>
<xs:enumeration value="UGX"/>
<xs:enumeration value="USD"/>
<xs:enumeration value="UYI"/>
<xs:enumeration value="UYU"/>
<xs:enumeration value="UZS"/>
<xs:enumeration value="VEF"/>
<xs:enumeration value="VND"/>
<xs:enumeration value="VUV"/>
<xs:enumeration value="WST"/>
<xs:enumeration value="XAF"/>
<xs:enumeration value="XCD"/>
<xs:enumeration value="XOF"/>
<xs:enumeration value="XPF"/>
<xs:enumeration value="YER"/>
<xs:enumeration value="ZAR"/>
<xs:enumeration value="ZMK"/>
<xs:enumeration value="ZWD"/>
<xs:enumeration value="ZWL"/>
</xs:restriction>
</xs:simpleType>
<xs:simpleType name="SORTCODE">
  <xs:restriction base="xs:string">
    <xs:minLength value="6"/>
    <xs:maxLength value="6"/>
    <xs:pattern value="^\d{6}$"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="BANKACC">
  <xs:restriction base="xs:string">
    <xs:minLength value="8"/>
    <xs:maxLength value="8"/>
    <xs:pattern value="^\d{8}$"/>
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="PAYMENT">
  <xs:restriction base="xs:string">
    <xs:maxLength value="4"/>
    <xs:pattern value="(R0|R1|R2|R5)?(P0|P1|P2|P5)?"/>
  </xs:restriction>
</xs:simpleType>
<xs:element name="SCHEME" type="SCHEME"/>
</xs:schema>
```

4.6.1 Schema Changes

Refer to the list of changes below.

Version	Description
V1.11	Added missing STATCODE values: G1,G2,G3,G4,G5,G6,G7,G8,G9,93,6P,59 & 46. See Status Codes .
V1.10	Added the ability to accept empty strings in the GPSEXPPDATE .
V1.09	Added a new field PRIMARYTOKEN .
V1.08	Added a new field GPSEXPPDATE .
V1.07	Spaces added as SchemeID are allowed.
V.1.06	GPS Balance XML Schema for normal balance files.

General FAQs

This section provides answers to frequently asked questions.

Types of Reports

What type of reports does GPS provide?

GPS provides the following reports to Program Managers:

- Transaction report
- Balance report

Note:

For Issuers and Self-Issuers, GPS provides two additional reports:

- Fee Collection Report
- Quarterly Management Report (QMR)

For details, please contact your implementation manager or account manager

Can I configure the details provided in each report?

No, the GPS reports are standard. If you require bespoke reports, please speak to your account manager.

How often are reports provided? Can I change this?

The GPS reports are provided daily. For specific details regarding report timing, please speak to your account manager.

For more frequent transaction information, we recommend you use the External Host Interface (EHI) which provides transaction reporting in real-time.

How are reports provided to customers?

The daily reports are provided via sFTP. This is on a push only basis.

How often do you change the fields in the report?

GPS will add new fields to the report in line with updates from the card schemes (Visa and Mastercard) or to reflect other changes relevant to the payments industry or our service.

When we make changes to the reports, we will update the technical documentation and notify you of the change.

Are reports encrypted?

Yes. Reports are encrypted using the PGP standard.

How do I identify the version of the report?

The XML schema version is listed in the comments section of the schema, together with details of what has changed. See [Balance Report XML Schema](#). We currently do not provide the XML version within the XML report.

How large is a typical report?

This is based on the number of your transactions and can be anything from 1Kb to 2GB. We will split up anything larger than 2GB into smaller files: eg., *filename.001*, *filename.002* and so on.

Do you store reports and if so, for how long?

Reports are stored for up to 2 calendar days on the sFTP server, after which they are deleted from the sFTP server. We keep an archive of historical files for a limited period. For access to historical files, please raise a JIRA request.

How can I use the reports?

You can use them to do the following:

- Update to your card balance/transaction database
- For card balance/transaction reconciliation purposes

Glossary

This page provides a list of glossary terms used in this guide.

A

Acquirer

The merchant acquirer or bank that offers the merchant a trading account, to enable the merchant to take payments in store or online from card-holders.

Authentication

This includes checks to confirm the cardholder identity, such as PIN, CVV2 and CAVV.

Authorisation

Stage where a merchant requests approval for a card payment by sending a request to the card issuer to check that the card is valid, and that the requested authorisation amount is available on the card. At this stage the funds are not deducted from the card.

B

BIN Attack

A BIN attack is a type of BIN scamming in which a fraudster takes the first six numbers and runs software to generate the rest of the numbers. After the fraudster identifies a full account number, they will test it via credit card testing.

C

Card Scheme

Card network, such as MasterCard or Visa, responsible for managing transactions over the network and for arbitration of any disputes.

Chargeback

Where a cardholder disputes a transaction on their account and is unable to resolve directly with the merchant, they can raise a chargeback with their card issuer. The chargeback must be for a legitimate reason, such as goods and services not received, faulty goods, or a fraudulent transaction.

Clearing File/Clearing Transaction

GPS receive batch clearing files from the card networks, containing clearing transactions, such as presentments and network fees. The card issuer transfers the requested settlement amount to the acquirer and 'clears' the amount on the card, reducing the available card balance accordingly.

E

External Host Interface (EHI)

The External Host Interface provides a facility to enable exchange of data between GPS and external systems via our web services. All transaction data processed by GPS is transferred to the External Host side via EHI in real time. For certain types of transactions, such as Authorisations, the External Host can participate in payment transaction authorisation.

I

ICA

The Interbank Card Association Number (ICA) is a five-digit number assigned by MasterCard to a financial institution, third-party processor or other member to identify the member in the transaction.

Issuer

The card issuer, typically a financial organisation authorised to issue cards. The issuer has a direct relationship with the relevant card scheme.

M

Merchant

The shop or store providing a product or service that the cardholder is purchasing. A merchant must have a merchant account, provided by their acquirer, in order to trade. Physical stores use a terminal or card reader to request authorisation for transactions. Online sites provide an online shopping basket and use a payment service provider to process their payments.

Merchant Category Code (MCC)

A unique identifier of the merchant, to identify the type of account provided to them by their acquirer.

P

Program Manager

A GPS customer who manages a card program. The program manager can create branded cards, load funds and provide other card or banking services to their end customers.



Quarterly Management Report

Quarterly Management Report which issuers send to their card Scheme on a quarterly basis. Contact your Scheme for details.



sFTP

Secure File Transfer Protocol. File Transfer Protocol FTP) is a popular unencrypted method of transferring files between two remote systems. SFTP (SSH File Transfer Protocol, or Secure File Transfer Protocol) is a separate protocol packaged with SSH that works in a similar way but over a secure connection.

Smart Client

Smart Client is GPS's user interface for managing your account on the GPS Apex system. It is also called Smart Processor GPS. Smart Client is installed as a desktop application and requires a VPN connection to GPS systems in order to be able to access your account.

Document History

This section provides details of what has changed since in each document release.

Version	Date	Reason	Who
2.0.4	28/02/2023	Added Chinese Offshore Renminbi (currency code CNH) to the list of supported currencies. See Currency Codes .	WS
	25/01/2023	Update to the description of the XML report file naming convention. See Balance Data Files .	WS
	20/01/2023	Update to description of frequency of XML reports in FAQs section.	WS
	01/12/2022	Updated the Copyright Statement	MW
2.0.3	28/10/2022	Added a description of the GPS 16-digit public token .	WS
	12/10/2022	Updates to description of when the balance XML files can be generated. Updates to the Balance XML filename format to include details of the applicable Production environment. See Balance Data Files .	WS
	29/06/2022	Updates made to Introduction (QMR section) and Transactional Data Files (Sending of Files section).	JB
2.0.2	08/04/2022	Added the following missing STATCODE values to the XML schema: G1,G2,G3,G4,G5,G6,G7,G8,G9,93,6P,59 & 46. See Status Codes . New field PRIMARYTOKEN added to the CARD element, which shows the full Primary Account Number (PAN) of the card; If this is a secondary card, shows the full PAN of the linked primary card. See GPSPRN-109.	WS
	09/05/2022	Added the ability to accept empty strings in the GPSEXPPDATE . Added details of the <i>XMLCutoffUTCtime</i> setting, which allows you to set the equivalent local midnight cut-off time for receiving balance XML reports if the time zone in your country differs from the UK time. See Balance Data Files . Added a link to the Downloads page on the Documentation Portal, where you can view and download upcoming/future schema versions.	
2.0.1	23/08/2021	New <i>GPSEXPPDATE</i> field added to the CARD element. See GPSPRN-60.	WS
	01/10/2021	Updates to Card Satus Codes . See GPSPRN-48.	
2.0	09/06/2021	Major revamp to look and feel and organisation of the guide. Rewrite of content to simplify and make the guide easier to use.	WS
1.08	24/07/2020	Changed SchemeID, ProgramID and statcode as per DEV_REPORTING-396.	DM
1.07	11/05/2020	Updated Balance Data Files - Reporting Contents Description.	VS
1.06	10/06/2019	Added CRDACCNO description.	IF
1.05	08/03/2019	Added PRODUCTID and LASTUPDATED to the CARD element.	IF
1.04	16/04/2018	Updated Appendix B - Card Status Codes.	IF
1.01	12/09/2016	Added fields for Agency Banking and further corrections and small changes.	IF
1.0	23/08/2010	Initial draft.	IF

Contact Us

Please contact us if you have queries relating to this document. Our contact details are provided below.

Global Processing Services Ltd.
Support Email: ops24@globalprocessing.com
Support Phone: +442037409682

GPS Offices

UK Central Office	Singapore	Australia	Dubai, UAE
6th Floor, Victoria House	Republic Plaza	Stone & Chalk	EO 10, Ground Floor,
Bloomsbury Square	9 Raffles Place	Level 4, 11 York Street	Building 1
London	Singapore	Wynyard Green	Dubai Internet City
WC1B 4DA	048619	Sydney, NSW, 2000	Dubai, United Arab Emirates

Technical Publications

If you want to contact our technical publications team directly, for queries or feedback related to this guide, you can email us at: docs@globalprocessing.com.